

Floor Standing Network Cabinet

Feature:



- 19" standard installation achieves the international standard for the installation of the versatility of the parts, door interchangeability.
- Hexagonal reticular high-density vented plate front single door and rear double door.
- Assembled frame structure, assembled and disassembled shipment maximize saving shipping costs.
- Removable side panels, easy to install and maintain.
- Various optional accessories, convenient and fast installation, efficient cabinet buying kit.
- Adjustable feet and heavy duty castors are available at the same time, convenient to move or fix.
- Ventilation area reach to 71%, ventilation rate is 71%, can meet the requirements of heat dissipation.
- Several lockable cable entry on top cover and bottom panel. Front rear door and side panel easy to install and remove bottom ventilation and rat proof.
- Various optional dimension and structure according to customer requirements.




Physical Characteristics (Overall):

Floor standing network cabinet (mesh door)	
Main Material	SPCC cold rolled steel
Thickness	Mounting profile 2.0mm, mounting angle 1.5mm, others 1.2mm.
Surface Finish	Degreasing, pickling, phosphoric, powder coated
Degree of Protection	IP20
Loading Capacity	Static loading: 800KG
Color	Black RAL9004, Grey RAL7035

Product Details:



Installation in Structure:

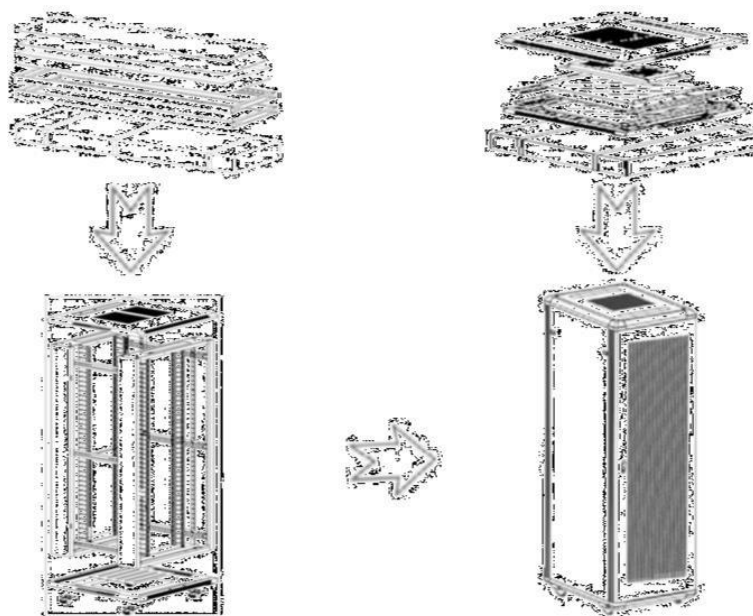

Main Parts:

S/N	Description	Quantity	Unit	Material	Surface Finish	Remark
1	Top cover	1	Piece	SPCC cold rolled steel 1.2	Powder coated	—
2	Frame	2	Piece	SPCC Cold rolled steel 1.5	Powder coated	—
3	Front door	1	Piece	5MM Toughened glass	Powder coated	—
4	Side panel	2	Piece	SPCC Cold rolled steel 1.2	Powder coated	steel door
5	Rear door	1	Piece	SPCC Cold rolled steel 1.2	Powder coated	steel door
6	Bottom panel	1	Set	SPCC Cold rolled steel 1.2	Powder coated	—
7	Mounting angle	4/6	Piece	SPCC Cold rolled steel 1.5	Powder coated	4pcs for lower 27U
8	Mounting profile	4	Piece	SPCC Cold rolled steel 2.0	Powder coated	—
9	Spacer	8/12	Piece	SPCC Cold rolled steel 1.2	Powder coated	For 800mm width cabinet only
10	M6 screw	20/40	Set	—	—	40pcs for over 32U
11	Spring lock	2	Piece	—	—	With 4 keys
12	2.0" heavy duty castor	4	Piece	—	—	—
13	Adjustable feet	4	Piece	—	—	—
14	Allen wrench	1	Piece	—	—	—
Remark: width 800mm and above 32U Cabinets with 12 spacer, lower 32U with 8 spacer						

Dimension:

Part Number	Capacity	Width (mm)	Depth (mm)	Height (mm)
PPSL-FS-6622	22U	600	600	1166
PPSL-FS-6822			800	
PPSL-FS-6122			1000	
PPSL-FS-8822		800	800	
PPSL-FS-8122			1000	



Wall-Mount Network Cabinet (Single Section)

PPSL-FS-6627	27U	600	600	138 8
PPSL-FS-6827			800	
PPSL-FS-6127			1000	
PPSL-FS-8827		800	800	
PPSL-FS-8127			1000	
PPSL-FS-6632	32U	600	600	161 0
PPSL-FS-6832			800	
PPSL-FS-6132			1000	
PPSL-FS-8832		800	800	
PPSL-FS-8132			1000	
PPSL-FS-6637	37U	600	600	183 3
PPSL-FS-6837			800	
PPSL-FS-6137			1000	
PPSL-FS-8837		800	800	
PPSL-FS-8137			1000	
PPSL-FS-6642	42U	600	600	205 5
PPSL-FS-6842			800	
PPSL-FS-6142			1000	
PPSL-FS-8842		800	800	
PPSL-FS-8142			1000	
PPSL-FS-8147	47U	800	1000	2277

