

Inline Type Fiber Optic Splice Closure

JC-48I44-AT is inline type 2 in 2 out fiber optic splice closure, max. 96 fibers splicing capacity. It support re-open using with utilizing sealing rubber gasket and it is suitable for aerial hanged, wall mounted application.



Features:

Material: ABS plastic

Sealing method : Mechanical Sealing

IP standard: IP65


Color : Black

Splice tray: 4pcs OST-049 splice trays, each tray 24fibers

Capacity: Max. 96 fibers


Cable port: 2 in 2 out for max. $\Phi 15.5\text{mm}$ cable entry or exit

Drawings: (mm)

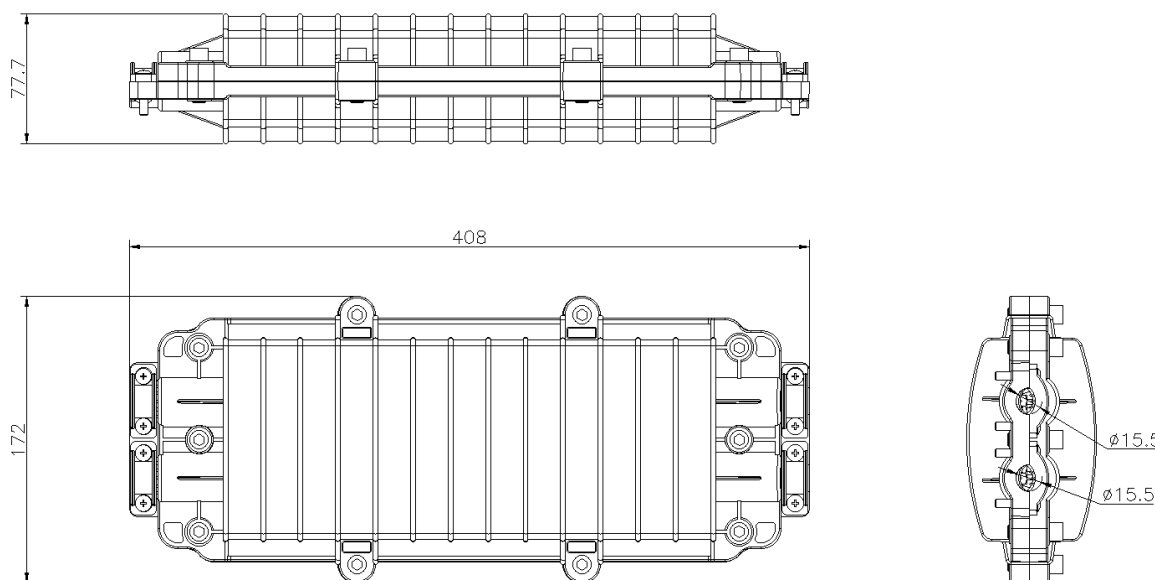

Instruction:



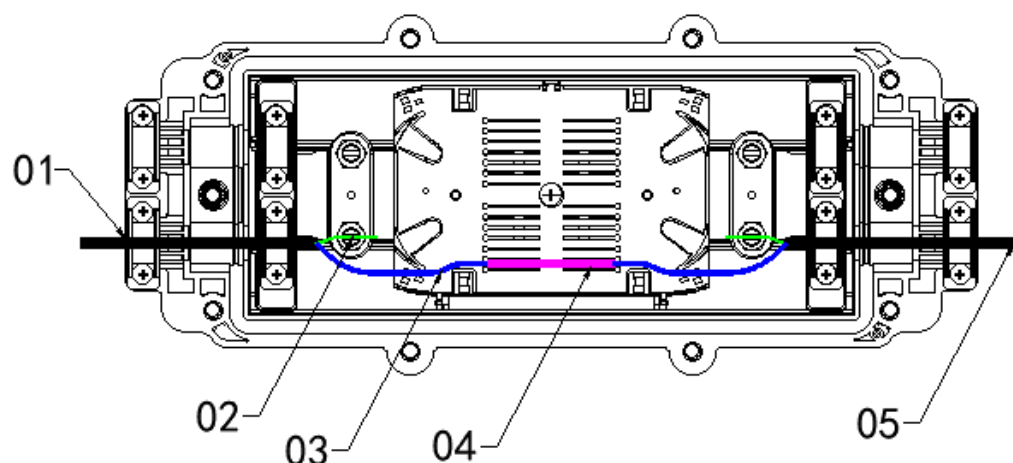

- 1、 Input port 2、 Strength member 3、 Stripped optical cable
4、 Heat shrinkable protection sleeve 5、 Output port

Accessories:

Item	Name	Specification	Qty
1	Heat shrinkable protection sleeve	60mm*3.0*1.5	As per using capacity
2	Plug	Black	2pcs
3	Cable tie	3mm*100mm/white	8pcs
4	Insulation tape	0.15*17mm*5 yard/black	1pc
5	Self-adhesive tape	15mm*2mm*500mm/black	1pc
6	Large flat head screw	M5*30, metal	8pcs
7	Hexagon socket head cap screw	M8*25, metal	8pcs

Packing information:

8pcs per carton, 13.8kgs, each carton 43x38x37cm



Picture:



Part Number:

Items Name	Part Number
Inline Type Fiber Optic Splice Closure	JC-48I44-AT

